



# GREEN POWER CHEMICAL 2010 WHOLESALE PRICING ON JRI® AQUEOUS PARTS WASHERS

## F-2532 FRONT LOAD



OVERALL DIMENSIONS	40"L x 62"W x 70"H
WORKING HEIGHT	32"
TURNTABLE DIAMETER	25"
WEIGHT CAPACITY	1000 LBS
TANK CAPACITY	90 GAL
PUMP SIZE	3 HP VERTICAL
PUMP OUTPUT	45 PSI @ 50 GPM
ELECTRIC HEAT	9 KW
ELECTRICAL CONTROLS	DEFINITE PURPOSE/ROCKER STYLE
ELECTRICAL ENCLOSURE:	NEMA 1 RATED

**STANDARD FEATURES:**  
 LOW WATER SHUT OFF  
 SWING DOWN SPRAY BAR  
 BRASS NOZZLES  
 FORKLIFT ACCESS FROM FRONT OF MACHINE  
 CHIP BASKET  
 OIL SKIMMER

### MILD STEEL

JRI Part #	Power Source	Distributor Price US\$
F-2532A	230 V 1PH	
F-2532E	230 V 3 PH	
F-2532F	460 V 3 PH	
F-2532B	208 V 1PH	
F-2532C	208 V 3PH	
F-2532D	575 V 3PH	

### CABINET ONLY STAINLESS

JRI Part #	Power Source	Distributor Price US\$
F-2532SSA	230 V 1PH	
F-2532SSE	230 V 3PH	
F-2532SSF	460 V 3PH	
F-2532SSB	208 V 1PH	
F-2532SSC	208 V 3PH	
F-2532SSD	575 V 3PH	

### ALL WETTED SURFACES STAINLESS

\*Does not include SS pump

JRI Part #	Power Source	Distributor Price US\$
F-2532SS2A	230 V 1PH	
F-2532SS2E	230 V 3PH	
F-2532SS2F	460 V 3PH	
F-2532SS2B	208 V 1PH	
F-2532SS2C	208 V 3PH	
F-2532SS2D	575 V 3PH	

### COMMON OPTIONS (see Options tab for complete list)

JRI Part #	Description	Distributor Price US\$
T-100	TIMER, ONE CHANNEL (CONTROLS HEAT)	
T-200	TIMER , TWO CHANNEL (CONTROLS HEAT & SKIMMER)	
CS-200	CASTERS, SWIVEL 5"	
AW-100	AUTOMATIC WATER FILL	



# GREEN POWER CHEMICAL 2010 WHOLESALE PRICING ON JRI® AQUEOUS PARTS WASHERS



## F-3142 FRONT LOAD

OVERALL DIMENSIONS	46"L x 67"W x 80"H
WORKING HEIGHT	42"
TURNTABLE DIAMETER	31"
WEIGHT CAPACITY	1000 LBS
TANK CAPACITY	140 GAL
PUMP SIZE	3 HP VERTICAL
PUMP OUTPUT	45 PSI @ 50 GPM
ELECTRIC HEAT	12 KW
ELECTRICAL CONTROLS	DEFINITE PURPOSE/ROCKER STYLE
ELECTRICAL ENCLOSURE:	NEMA 1 RATED

### STANDARD FEATURES:

- LOW WATER SHUT OFF
- SWING DOWN SPRAY BAR
- BRASS NOZZLES
- FORKLIFT ACCESS FROM FRONT OF MACHINE
- CHIP BASKET
- OIL SKIMMER

### MILD STEEL

JRI Part #	Power Source	Distributor Price US\$
F-3142A	230 V 1PH	
F-3142E	230 V 3 PH	
F-3142F	460 V 3 PH	
F-3142B	208 V 1PH	
F-3142C	208 V 3PH	
F-3142D	575 V 3PH	

### CABINET ONLY STAINLESS

JRI Part #	Power Source	Distributor Price US\$
F-3142SSA	230 V 1PH	
F-3142SSE	230 V 3PH	
F-3142SSF	460 V 3PH	
F-3142SSB	208 V 1PH	
F-3142SSC	208 V 3PH	
F-3142SSD	575 V 3PH	

### ALL WETTED SURFACES STAINLESS

\*Does not include SS pump

JRI Part #	Power Source	Distributor Price US\$
F-3142SS2A	230 V 1PH	
F-3142SS2E	230 V 3PH	
F-3142SS2F	460 V 3PH	
F-3142SS2B	208 V 1PH	
F-3142SS2C	208 V 3PH	
F-3142SS2D	575 V 3PH	

### COMMON OPTIONS (see Options tab for complete list)

JRI Part #	Description	Distributor Price US\$
T-100	TIMER, ONE CHANNEL (CONTROLS HEAT)	
T-200	TIMER , TWO CHANNEL (CONTROLS HEAT & SKIMMER)	
CS-200	CASTERS, SWIVEL 5"	
AW-100	AUTOMATIC WATER FILL	



# GREEN POWER CHEMICAL 2010 WHOLESALE PRICING ON JRI® AQUEOUS PARTS WASHERS

## F-3648 FRONT LOAD



OVERALL DIMENSIONS	52"L x 73"W x 90"H
INSIDE WORKING HEIGHT	48"
TURNTABLE DIAMETER	36"
WEIGHT CAPACITY	1500 LBS
TANK CAPACITY	170 GAL
PUMP SIZE	5 HP VERTICAL
PUMP OUTPUT	49 PSI @ 85 GPM
ELECTRIC HEAT	18 KW
ELECTRICAL CONTROLS	DEFINITE PURPOSE/ROCKER STYLE
ELECTRICAL ENCLOSURE:	NEMA 1 RATED
<b>STANDARD FEATURES:</b>	
LOW WATER SHUT OFF	
SWING DOWN SPRAY BAR	
BRASS NOZZLES	
FORKLIFT ACCESS FROM FRONT OF MACHINE	
CHIP BASKET	
OIL SKIMMER	

### MILD STEEL

JRI Part #	Power Source		Distributor Price US\$
F-3648E	230 V 3PH		
F-3648F	460 V 3PH		
F-3648C	208 V 3PH		
F-3648D	575 V 3PH		

### CABINET ONLY STAINLESS

JRI Part #	Power Source		Distributor Price US\$
F-3648SSE	230 V 3PH		
F-3648SSF	460 V 3PH		
F-3648SSC	208 V 3PH		
F-3648SSD	575 V 3PH		

### ALL WETTED SURFACES STAINLESS

\*Does not include SS pump

JRI Part #	Power Source		Distributor Price US\$
F-3648SS2E	230 V 3PH		
F-3648SS2F	460 V 3PH		
F-3648SS2C	208 V 3PH		
F-3648SS2D	575 V 3PH		

### COMMON OPTIONS (see Options tab for complete list)

JRI Part #	Description		Distributor Price US\$
T-100	TIMER, ONE CHANNEL (CONTROLS HEAT)		
T-200	TIMER, TWO CHANNEL (CONTROLS HEAT & SKIMMER)		
CS-200	CASTERS, SWIVEL 5"		
AW-100	AUTOMATIC WATER FILL		



# GREEN POWER CHEMICAL 2010 WHOLESALE PRICING ON JRI® AQUEOUS PARTS WASHERS

## F-4260 FRONT LOAD



OVERALL DIMENSIONS	58"L x 79"W x 110"H
INSIDE WORKING HEIGHT	60"
TURNTABLE DIAMETER	42"
WEIGHT CAPACITY	1500 LBS
TANK CAPACITY	250 GAL
PUMP SIZE	7.5 HP
PUMP OUTPUT	74 PSI @ 120 GPM
ELECTRIC HEAT	18 KW
ELECTRICAL CONTROLS	DEFINITE PURPOSE/ROCKER STYLE
ELECTRICAL ENCLOSURE:	NEMA 1 RATED

**STANDARD FEATURES:**  
 LOW WATER SHUT OFF  
 SWING DOWN SPRAY BAR  
 BRASS NOZZLES  
 FORKLIFT ACCESS FROM FRONT OF MACHINE  
 CHIP BASKET  
 OIL SKIMMER

### MILD STEEL

JRI Part #	Power Source		Distributor Price US\$
F-4260E	230 V 3PH		
F-4260F	460 V 3PH		
F-4260C	208 V 3PH		
F-4260D	575 V 3PH		

### CABINET ONLY STAINLESS

JRI Part #	Power Source		Distributor Price US\$
F-4260SSE	230 V 3PH		
F-4260SSF	460 V 3PH		
F-4260SSC	208 V 3PH		
F-4260SSD	575 V 3PH		

### ALL WETTED SURFACES STAINLESS

\*Does not include SS pump

JRI Part #	Power Source		Distributor Price US\$
F-4260SS2E	230 V 3PH		
F-4260SS2F	460 V 3PH		
F-4260SS2C	208 V 3PH		
F-4260SS2D	575 V 3PH		

### COMMON OPTIONS (see Options tab for complete list)

JRI Part #	Description	Price US\$
T-100	TIMER, ONE CHANNEL (CONTROLS HEAT)	
T-200	TIMER , TWO CHANNEL (CONTROLS HEAT & SKIMMER)	
CS-200	CASTERS, SWIVEL 5"	
AW-100	AUTOMATIC WATER FILL	



# GREEN POWER CHEMICAL 2010 WHOLESALE PRICING ON JRI® AQUEOUS PARTS WASHERS



## F-5060 FRONT LOAD

OVERALL DIMENSIONS	58"L x 79"W x 97"H
INSIDE WORKING HEIGHT	60"
TURNTABLE DIAMETER	50"
WEIGHT CAPACITY	1500 LBS
TANK CAPACITY	265 GAL
PUMP SIZE	7.5 HP
PUMP OUTPUT	68 PSI @ 120 GPM
ELECTRIC HEAT	18 KW
ELECTRICAL CONTROLS	DEFINITE PURPOSE/ROCKER STYLE
ELECTRICAL ENCLOSURE:	NEMA 1 RATED
<b>STANDARD FEATURES:</b>	
LOW WATER SHUT OFF	
SWING DOWN SPRAY BAR	
BRASS NOZZLES	
FORKLIFT ACCESS FROM FRONT OF MACHINE	
CHIP BASKET	
OIL SKIMMER	

### MILD STEEL

JRI Part #	Power Source	Distributor Price US\$
F-5060E	230 V 3PH	
F-5060F	460 V 3PH	
F-5060C	208 V 3PH	
F-5060D	575 V 3PH	

### CABINET ONLY STAINLESS

JRI Part #	Power Source	Distributor Price US\$
F-5060SSE	230 V 3PH	
F-5060SSF	460 V 3PH	
F-5060SSC	208 V 3PH	
F-5060SSD	575 V 3PH	

### ALL WETTED SURFACES STAINLESS

\*Does not include SS pump

JRI Part #	Power Source	Distributor Price US\$
F-5060SS2E	230 V 3PH	
F-5060SS2F	460 V 3PH	
F-5060SS2C	208 V 3PH	
F-5060SS2D	575 V 3PH	

### COMMON OPTIONS (see Options tab for complete list)

JRI Part #	Description	Price US\$
T-100	TIMER, ONE CHANNEL (CONTROLS HEAT)	
T-200	TIMER , TWO CHANNEL (CONTROLS HEAT & SKIMMER)	
CS-200	CASTERS, SWIVEL 5"	
AW-100	AUTOMATIC WATER FILL	



# GREEN POWER CHEMICAL 2010 WHOLESALE PRICING ON JRI® PREMIUM INDUSTRIAL TOP LOAD MODELS

## TLS-21 TOP LOAD



OVERALL DIMENSIONS 33" L X 31" W X 45" H (LID CLOSED)  
 INSIDE WORKING HEIGHT 15"  
 TURNTABLE DIAMETER 21"  
 WEIGHT CAPACITY 250 LBS  
 TANK CAPACITY 32 GAL  
 PUMP SIZE 3/4 HP VERTICAL  
 PUMP OUTPUT 25 PSI @ 20 GPM  
 ELECTRIC HEAT 1.5 KW FOR 110v 4.5 KW ALL OTHERS  
 ELECTRICAL CONTROLS DEFINITE PURPOSE/ROCKER STYLE  
 ELECTRICAL ENCLOSURE: LOCATED INSIDE CABINET  
**STANDARD FEATURES:**  
 LOW WATER SHUT OFF  
 BRASS NOZZLES  
 2-1/2 INCH CASTERS  
 DEBRIS SCREEN

## MILD STEEL

JRI Part #	Power Source	Distributor Price US\$
TLS-21 LV	110 V 1PH	
TLS-21A	230 V 1PH	
TLS-21E	230 V 3PH	
TLS-21F	460 V 3PH	
TLS-21B	208 V 1PH	
TLS-21C	208 V 3PH	
TLS-21D	575 V 3PH	

## COMMON OPTIONS (see Options tab for complete list)

JRI Part #	Description	Distributor Price US\$
T-100	TIMER, ONE CHANNEL (CONTROLS HEAT)	
T-200	TIMER , TWO CHANNEL (CONTROLS HEAT & SKIMMER)	
THM-200	THERMOSTAT, DIGITAL SINGLE CHANNEL	
AW-100	AUTOMATIC WATER FILL	



# GREEN POWER CHEMICAL 2010 WHOLESALE PRICING ON JRI® PREMIUM INDUSTRIAL TOP LOAD MODELS

## TL-21 TOP LOAD



OVERALL DIMENSIONS 37" L X 35" W X 44" H (LID CLOSED)  
 INSIDE WORKING HEIGHT 18"  
 TURNTABLE DIAMETER 21"  
 WEIGHT CAPACITY 500 LBS  
 TANK CAPACITY 32 GAL  
 PUMP SIZE 1.5 HP VERTICAL  
 PUMP OUTPUT 40 PSI @ 24 GPM  
 ELECTRIC HEAT 6 KW  
 ELECTRICAL CONTROLS INDUSTRIAL IEC/ROTARY STYLE  
 ELECTRICAL ENCLOSURE: NEMA 12 RATED

### **STANDARD FEATURES:**

LOW WATER SHUT OFF  
 STAINLESS STEEL NOZZLES W/ BUSHINGS  
 2-1/2 INCH CASTERS  
 DEBRIS SCREEN

### MILD STEEL

JRI Part #	Power Source	Distributor Price US\$
TL-21A	230 V 1PH	
TL-21E	230 V 3PH	
TL-21F	460 V 3PH	
TL-21B	208 V 1PH	
TL-21C	208 V 3PH	
TL-21D	575 V 3PH	

### CABINET ONLY STAINLESS

JRI Part #	Power Source	Distributor Price US\$
TL-21SSA	230 V 1PH	
TL-21SSE	230 V 3PH	
TL-21SSF	460 V 3PH	
TL-21SSB	208 V 1PH	
TL-21SSC	208 V 3PH	
TL-21SSD	575 V 3PH	

### ALL WETTED SURFACES STAINLESS

\*Does not include SS pump

JRI Part #	Power Source	Distributor Price US\$
TL-21SS2A	230 V 1PH	
TL-21SS2E	230 V 3PH	
TL-21SS2F	460 V 3PH	
TL-21SS2B	208 V 1PH	
TL-21SS2C	208 V 3PH	
TL-21SS2D	575 V 3PH	

### COMMON OPTIONS (see Options tab for complete list)

JRI Part #	Description	Distributor Price US\$
OS-100SS	OIL SKIMMER WITH 12" STAINLESS STEEL WHEEL	
T-100	TIMER, ONE CHANNEL (CONTROLS HEAT)	
T-200	TIMER, TWO CHANNEL (CONTROLS HEAT & SKIMMER)	
THM-200	THERMOSTAT, DIGITAL SINGLE CHANNEL	
AW-100	AUTOMATIC WATER FILL	
FF-100	FAXON FLOAT - AUTO WATER FILL & LOW WATER SHUT-OFF COMBINATION	



# GREEN POWER CHEMICAL 2010 WHOLESALE PRICING ON JRI® PREMIUM INDUSTRIAL TOP LOAD MODELS



## TL-25 TOP LOAD

OVERALL DIMENSIONS	47" L X 41" W X 50" H (LID CLOSED)
INSIDE WORKING HEIGHT	24"
TURNTABLE DIAMETER	25"
WEIGHT CAPACITY	1000 LBS
TANK CAPACITY	85 GAL
PUMP SIZE	3 HP VERTICAL
PUMP OUTPUT	45 PSI @ 50 GPM
ELECTRIC HEAT	9 KW
ELECTRICAL CONTROLS	INDUSTRIAL IEC/ROTARY STYLE
ELECTRICAL ENCLOSURE:	NEMA 12 RATED

### **STANDARD FEATURES:**

LOW WATER SHUT OFF  
STAINLESS STEEL NOZZLES W/ BUSHINGS  
DEBRIS SCREEN

### MILD STEEL

JRI Part #	Power Source	Distributor Price US\$
TL-25A	230 V 1PH	
TL-25E	230 V 3PH	
TL-25F	460 V 3PH	
TL-25B	208 V 1PH	
TL-25C	208 V 3PH	
TL-25D	575 V 3PH	

### CABINET ONLY STAINLESS

JRI Part #	Power Source	Distributor Price US\$
TL-25SSA	230 V 1PH	
TL-25SSE	230 V 3PH	
TL-25SSF	460 V 3PH	
TL-25SSB	208 V 1PH	
TL-25SSC	208 V 3PH	
TL-25SSD	575 V 3PH	

### ALL WETTED SURFACES STAINLESS

\*Does not include SS pump

JRI Part #	Power Source	Distributor Price US\$
TL-25SS2A	230 V 1PH	
TL-25SS2E	230 V 3PH	
TL-25SS2F	460 V 3PH	
TL-25SS2B	208 V 1PH	
TL-25SS2C	208 V 3PH	
TL-25SS2D	575 V 3PH	

### COMMON OPTIONS (see Options tab for complete list)

JRI Part #	Description	Distributor Price US\$
OS-100SS	OIL SKIMMER WITH 12" STAINLESS STEEL WHEEL	
T-100	TIMER, ONE CHANNEL (CONTROLS HEAT)	
T-200	TIMER, TWO CHANNEL (CONTROLS HEAT & SKIMMER)	
THM-200	THERMOSTAT, DIGITAL SINGLE CHANNEL	
AW-100	AUTOMATIC WATER FILL	
FF-100	FAXON FLOAT - AUTO WATER FILL & LOW WATER SHUT-OFF COMBINATION	





# GREEN POWER CHEMICAL 2010 WHOLESALE PRICING ON JRI® PREMIUM INDUSTRIAL TOP LOAD MODELS

## TL-31 Top Load



OVERALL DIMENSIONS 54"L X 47"W X 59" H ( LID CLOSED)  
 INSIDE WORKING HEIGHT 32"  
 TURNTABLE DIAMETER 31"  
 WEIGHT CAPACITY 1000 LBS  
 TANK CAPACITY 125 GAL  
 PUMP SIZE 3 HP VERTICAL PUMP  
 OUTPUT 45 PSI @ 50 GPM ELECTRIC  
 HEAT 13.5 KW SINGLE PHASE

12 KW THREE PHASE  
 ELECTRICAL CONTROLS INDUSTRIAL IEC/ROTARY STYLE  
 ELECTRICAL ENCLOSURE: NEMA 12 RATED

### **STANDARD FEATURES:**

LOW WATER SHUT OFF  
 SWING AWAY SPRAY BAR  
 STAINLESS STEEL NOZZLES W/ BUSHINGS  
 DEBRIS SCREEN  
 CHIP BASKET

### MILD STEEL

JRI Part #	Power Source	Distributor Price US\$
TL-31A	230 V 1PH	
TL-31E	230 V 3PH	
TL-31F	460 V 3PH	
TL-31B	208 V 1PH	
TL-31C	208 V 3PH	
TL-31D	575 V 3PH	

### CABINET ONLY STAINLESS

JRI Part #	Power Source	Distributor Price US\$
TL-31SSA	230 V 1PH	
TL-31SSE	230 V 3PH	
TL-31SSF	460 V 3PH	
TL-31SSB	208 V 1PH	
TL-31SSC	208 V 3PH	
TL-31SSD	575 V 3PH	

### ALL WETTED SURFACES STAINLESS

\*Does not include SS pump

JRI Part #	Power Source	Distributor Price US\$
TL-31SS2A	230 V 1PH	
TL-31SS2E	230 V 3PH	
TL-31SS2F	460 V 3PH	
TL-31SS2B	208 V 1PH	
TL-31SS2C	208 V 3PH	
TL-31SS2D	575 V 3PH	

### COMMON OPTIONS (see Options tab for complete list)

JRI Part #	Description	Distributor Price US\$
OS-100SS	OIL SKIMMER WITH 12" STAINLESS STEEL WHEEL	
T-100	TIMER, ONE CHANNEL (CONTROLS HEAT)	
T-200	TIMER , TWO CHANNEL (CONTROLS HEAT & SKIMMER)	
THM-200	THERMOSTAT, DIGITAL SINGLE CHANNEL	
AW-100	AUTOMATIC WATER FILL	
FF-100	FAXON FLOAT - AUTO WATER FILL & LOW WATER SHUT-OFF COMBINATION	



# GREEN POWER CHEMICAL 2010 WHOLESALE PRICING ON JRI® PREMIUM INDUSTRIAL TOP LOAD MODELS

## TL-36 Top Load



OVERALL DIMENSIONS 57"L X 52"W X 61" H ( LID CLOSED)  
 INSIDE WORKING HEIGHT 32"  
 TURNTABLE DIAMETER 36"  
 WEIGHT CAPACITY 1500 LBS  
 TANK CAPACITY 170 GAL  
 PUMP SIZE 5 HP VERTICAL  
 PUMP OUTPUT 49 PSI @ 85 GPM  
 ELECTRIC HEAT 18 KW  
 ELECTRICAL CONTROLS INDUSTRIAL IEC/ROTARY STYLE  
 ELECTRICAL ENCLOSURE: NEMA 12 RATED

**STANDARD FEATURES:**  
 LOW WATER SHUT OFF  
 SWING AWAY SPRAY BAR  
 STAINLESS STEEL NOZZLES W/ BUSHINGS  
 DEBRIS SCREEN  
 CHIP BASKET

### MILD STEEL

JRI Part #	Power Source	Distributor Price US\$
TL-36E	230 V 3PH	
TL-36F	460 V 3PH	
TL-36C	208 V 3PH	
TL-36D	575 V 3PH	

### CABINET ONLY STAINLESS

JRI Part #	Power Source	Distributor Price US\$
TL-36SSE	230 V 3PH	
TL-36SSF	460 V 3PH	
TL-36SSC	208 V 3PH	
TL-36SSD	575 V 3PH	

### ALL WETTED SURFACES STAINLESS

\*Does not include SS pump

JRI Part #	Power Source	Distributor Price US\$
TL-36SS2E	230 V 3PH	
TL-36SS2F	460 V 3PH	
TL-36SS2C	208 V 3PH	
TL-36SS2D	575 V 3PH	

### COMMON OPTIONS (see Options tab for complete list)

JRI Part #	Description	Distributor Price US\$
OS-100SS	OIL SKIMMER WITH 12" STAINLESS STEEL WHEEL	
T-100	TIMER, ONE CHANNEL (CONTROLS HEAT)	
T-200	TIMER , TWO CHANNEL (CONTROLS HEAT & SKIMMER)	
THM-200	THERMOSTAT, DIGITAL SINGLE CHANNEL	
AW-100	AUTOMATIC WATER FILL	
FF-100	FAXON FLOAT - AUTO WATER FILL & LOW WATER SHUT-OFF COMBINATION	



# GREEN POWER CHEMICAL 2010 WHOLESALE PRICING ON JRI® PREMIUM INDUSTRIAL TOP LOAD MODELS

## TL-42 Top Load



OVERALL DIMENSIONS	81" L X 63" L X 68" H (LID CLOSED)
INSIDE WORKING HEIGHT	36"
TURNTABLE DIAMETER	42"
WEIGHT CAPACITY	1500 LBS
TANK CAPACITY	220 GAL
PUMP SIZE	7.5 HP VERTICAL
PUMP OUTPUT	74 PSI @ 120 GPM
ELECTRIC HEAT	18 KW
ELECTRICAL CONTROLS	INDUSTRIAL IEC/ROTARY STYLE
ELECTRICAL ENCLOSURE:	NEMA 12 RATED
<b>STANDARD FEATURES:</b>	
LOW WATER SHUT OFF	
SWING AWAY SPRAY BAR	
STAINLESS STEEL NOZZLES W/ BUSHINGS	
DEBRIS SCREEN	
HYDRAULIC LID ACTUATOR	
CHIP BASKET	

### MILD STEEL

JRI Part #	Power Source		Distributor Price US\$
TL-42E	230 V 3PH		
TL-42F	460 V 3PH		
TL-42C	208 V 3PH		
TL-42D	575 V 3PH		

### CABINET ONLY STAINLESS

JRI Part #	Power Source		Distributor Price US\$
TL-42SSE	230 V 3PH		
TL-42SSF	460 V 3PH		
TL-42SSC	208 V 3PH		
TL-42SSD	575 V 3PH		

### ALL WETTED SURFACES STAINLESS

\*Does not include SS pump

JRI Part #	Power Source		Distributor Price US\$
TL-42SS2E	230 V 3PH		
TL-42SS2F	460 V 3PH		
TL-42SS2C	208 V 3PH		
TL-42SS2D	575 V 3PH		

### COMMON OPTIONS (see Options tab for complete list)

JRI Part #	Description		Distributor Price US\$
OS-100SS	OIL SKIMMER WITH 12" STAINLESS STEEL WHEEL		
T-100	TIMER, ONE CHANNEL (CONTROLS HEAT)		
T-200	TIMER, TWO CHANNEL (CONTROLS HEAT & SKIMMER)		
THM-200	THERMOSTAT, DIGITAL SINGLE CHANNEL		
AW-100	AUTOMATIC WATER FILL		
FF-100	FAXON FLOAT - AUTO WATER FILL & LOW WATER SHUT-OFF COMBINATION		



# GREEN POWER CHEMICAL 2010 WHOLESALE PRICING ON JRI® PREMIUM INDUSTRIAL TOP LOAD MODELS

## TL-50 Top Load



OVERALL DIMENSIONS	82"L x 68"W x 72" H (LID CLOSED)
INSIDE WORKING HEIGHT	36"
TURNTABLE DIAMETER	50"
WEIGHT CAPACITY	1500 LBS
TANK CAPACITY	290 GAL
PUMP SIZE	10 HP VERTICAL
PUMP OUTPUT	72 PSI @ 150 GPM
ELECTRIC HEAT	36 KW
ELECTRICAL CONTROLS	INDUSTRIAL IEC/ROTARY STYLE
ELECTRICAL ENCLOSURE:	NEMA 12 RATED

**STANDARD FEATURES:**  
 LOW WATER SHUT OFF  
 STAINLESS STEEL NOZZLES W/ BUSHINGS  
 DEBRIS SCREEN  
 HYDRAULIC LID ACTUATOR  
 CHIP BASKET

### MILD STEEL

JRI Part #	Power Source		Distributor Price US\$
TL-50E	230 V 3PH		
TL-50F	460 V 3PH		
TL-50C	208 V 3PH		
TL-50D	575 V 3PH		

### CABINET ONLY STAINLESS

JRI Part #	Power Source		Distributor Price US\$
TL-50SSE	230 V 3PH		
TL-50SSF	460 V 3PH		
TL-50SSC	208 V 3PH		
TL-50SSD	575 V 3PH		

### ALL WETTED SURFACES STAINLESS

\*Does not include SS pump

JRI Part #	Power Source		Distributor Price US\$
TL-50SS2E	230 V 3PH		
TL-50SS2F	460 V 3PH		
TL-50SS2C	208 V 3PH		
TL-50SS2D	575 V 3PH		

**\*\*CONSULT WITH JRI ON CORRECT OPTIONS FOR CUSTOMER APPLICATION\*\***



# GREEN POWER CHEMICAL 2010 WHOLESALE PRICING ON JRI® PREMIUM INDUSTRIAL TOP LOAD MODELS

## TL-60 Top Load



OVERALL DIMENSIONS	93"L X 88"W X 74"H (LID CLOSED)
INSIDE WORKING HEIGHT	36"
TURNTABLE DIAMETER	60"
WEIGHT CAPACITY	1500 LBS
TANK CAPACITY	390 GAL
PUMP SIZE	15 HP VERTICAL
PUMP OUTPUT	75 PSI @ 200 GPM
ELECTRIC HEAT	36 KW
ELECTRICAL CONTROLS	INDUSTRIAL IEC/ROTARY STYLE
ELECTRICAL ENCLOSURE:	NEMA 12 RATED
<b>STANDARD FEATURES:</b>	
LOW WATER SHUT OFF	
STAINLESS STEEL NOZZLES W/ BUSHINGS	
DEBRIS SCREEN	
HYDRAULIC LID ACTUATOR	
CHIP BASKET	

### MILD STEEL

JRI Part #	Power Source		Distributor Price US\$
TL-60E	230 V 3PH		
TL-60F	460 V 3PH		
TL-60C	208 V 3PH		
TL-60D	575 V 3PH		

### CABINET ONLY STAINLESS

JRI Part #	Power Source		Distributor Price US\$
TL-60SSE	230 V 3PH		
TL-60SSF	460 V 3PH		
TL-60SSC	208 V 3PH		
TL-60SSD	575 V 3PH		

### ALL WETTED SURFACES STAINLESS

\*Does not include SS pump

JRI Part #	Power Source		Distributor Price US\$
TL-60SS2E	230 V 3PH		
TL-60SS2F	460 V 3PH		
TL-60SS2C	208 V 3PH		
TL-60SS2D	575 V 3PH		

**\*\*CONSULT WITH JRI ON CORRECT OPTIONS FOR CUSTOMER APPLICATION\*\***



# GREEN POWER CHEMICAL 2010 WHOLESALE PRICING ON JRI® PREMIUM INDUSTRIAL TOP LOAD MODELS

## TL-72 Top Load



OVERALL DIMENSIONS	108"L x 90"W x 84"H (LID CLOSED)
INSIDE WORKING HEIGHT	36"
TURNTABLE DIAMETER	72"
WEIGHT CAPACITY	2000 LBS
TANK CAPACITY	530 GAL
PUMP SIZE	15 HP VERTICAL
PUMP OUTPUT	75 PSI @ 200 GPM
ELECTRIC HEAT	36 KW
ELECTRICAL CONTROLS	INDUSTRIAL IEC/ROTARY STYLE
ELECTRICAL ENCLOSURE:	NEMA 12 RATED
<b>STANDARD FEATURES:</b>	
LOW WATER SHUT OFF	
STAINLESS STEEL NOZZLES W/ BUSHINGS	
DEBRIS SCREEN	
HYDRAULIC LID ACTUATOR	
CHIP BASKET	

### MILD STEEL

JRI Part #	Power Source	Distributor Price US\$
TL-72E	230 V 3PH	
TL-72F	460 V 3PH	
TL-72C	208 V 3PH	
TL-72D	575 V 3PH	

### CABINET ONLY STAINLESS

JRI Part #	Power Source	Distributor Price US\$
TL-72SSE	230 V 3PH	
TL-72SSF	460 V 3PH	
TL-72SSC	208 V 3PH	
TL-72SSD	575 V 3PH	

### ALL WETTED SURFACES STAINLESS

\*Does not include SS pump

JRI Part #	Power Source	Distributor Price US\$
TL-72SS2E	230 V 3PH	
TL-72SS2F	460 V 3PH	
TL-72SS2C	208 V 3PH	
TL-72SS2D	575 V 3PH	

**\*\*CONSULT WITH JRI ON CORRECT OPTIONS FOR CUSTOMER APPLICATION\*\***



# JRI® INDUSTRIES

## PREMIUM INDUSTRIAL FRONT LOAD MODELS



### PCS-2532

OVERALL DIMENSIONS 52" L X 43" W X 64" H  
 INSIDE WORKING HEIGHT 32"  
 TURNTABLE DIAMETER 25" STATIONARY  
 WEIGHT CAPACITY 1000 LBS  
 TANK CAPACITY 95 GAL  
 PUMP SIZE 3 HP VERTICAL PUMP  
 OUTPUT 45 PSI @ 50 GPM ELECTRIC  
 HEAT (2) 4.5 KW SINGLE PHASE  
 9 KW THREE PHASE  
 ELECTRICAL CONTROLS INDUSTRIAL IEC/ROTARY STYLE  
 ELECTRICAL ENCLOSURE: NEMA 12 RATED

#### STANDARD FEATURES:

LOW WATER SHUT OFF  
 SWING AWAY SPRAY BAR  
 STAINLESS STEEL NOZZLES W/ BUSHINGS  
 FORKLIFT ACCESS FROM FRONT OF MACHINE  
 DEBRIS SCREEN  
 CHIP BASKET

### MILD STEEL

JRI Part #	Power Source	Distributor Price US\$
PCS-2532A	230 V 1PH	
PCS-2532E	230 V 3PH	
PCS-2532F	460 V 3PH	
PCS-2532B	208 V 1PH	
PCS-2532C	208 V 3PH	
PCS-2532D	575 V 3PH	

### CABINET ONLY STAINLESS

JRI Part #	Power Source	Distributor Price US\$
PCS-2532SSA	230 V 1PH	
PCS-2532SSE	230 V 3PH	
PCS-2532SSF	460 V 3PH	
PCS-2532SSB	208 V 1PH	
PCS-2532SSC	208 V 3PH	
PCS-2532SSD	575 V 3PH	

### ALL WETTED SURFACES STAINLESS

\*Does not include SS pump

JRI Part #	Power Source	Distributor Price US\$
PCS-2532SS2A	230 V 1PH	
PCS-2532SS2E	230 V 3PH	
PCS-2532SS2F	460 V 3PH	
PCS-2532SS2B	208 V 1PH	
PCS-2532SS2C	208 V 3PH	
PCS-2532SS2D	575 V 3PH	

### COMMON OPTIONS (see Options tab for complete list)

JRI Part #	Description	Distributor Price US\$
OS-100SS	OIL SKIMMER WITH 12" STAINLESS STEEL WHEEL	
T-100	TIMER, ONE CHANNEL (CONTROLS HEAT)	
T-200	TIMER, TWO CHANNEL (CONTROLS HEAT & SKIMMER)	
THM-200	THERMOSTAT, DIGITAL SINGLE CHANNEL	
AW-100	AUTOMATIC WATER FILL	
FF-100	FAXON FLOAT - AUTO WATER FILL & LOW WATER SHUT-OFF COMBINATION	



# JRI® INDUSTRIES

## PREMIUM INDUSTRIAL FRONT LOAD MODELS



### PCS-3136

OVERALL DIMENSIONS 56" L x 49" W x 70" H  
 INSIDE WORKING HEIGHT 36"  
 TURNTABLE DIAMETER 31" ROLL-OUT  
 WEIGHT CAPACITY 1000 LBS  
 TANK CAPACITY 140 GAL  
 PUMP SIZE 3 HP VERTICAL PUMP  
 OUTPUT 45 PSI @ 50 GPM ELECTRIC  
 HEAT 13.5 KW SINGLE PHASE  
 12 KW THREE PHASE  
 ELECTRICAL CONTROLS INDUSTRIAL IEC/ROTARY STYLE  
 ELECTRICAL ENCLOSURE: NEMA 12 RATED

#### STANDARD FEATURES:

LOW WATER SHUT OFF  
 SWING AWAY SPRAY BAR  
 STAINLESS STEEL NOZZLES W/ BUSHINGS  
 FORKLIFT ACCESS FROM FRONT OF MACHINE  
 DEBRIS SCREEN  
 CHIP BASKET

### MILD STEEL

JRI Part #	Power Source	Distributor Price US\$
PCS-3136A	230 V 1PH	
PCS-3136E	230 V 3PH	
PCS-3136F	460 V 3PH	
PCS-3136B	208 V 1PH	
PCS-3136C	208 V 3PH	
PCS-3136D	575 V 3PH	

### CABINET ONLY STAINLESS

JRI Part #	Power Source	Distributor Price US\$
PCS-3136SSA	230 V 1PH	
PCS-3136SSE	230 V 3PH	
PCS-3136SSF	460 V 3PH	
PCS-3136SSB	208 V 1PH	
PCS-3136SSC	208 V 3PH	
PCS-3136SSD	575 V 3PH	

### ALL WETTED SURFACES STAINLESS

\*Does not include SS pump

JRI Part #	Power Source	Distributor Price US\$
PCS-3136SS2A	230 V 1PH	
PCS-3136SS2E	230 V 3PH	
PCS-3136SS2F	460 V 3PH	
PCS-3136SS2B	208 V 1PH	
PCS-3136SS2C	208 V 3PH	
PCS-3136SS2D	575 V 3PH	

### COMMON OPTIONS (see Options tab for complete list)

JRI Part #	Description	Distributor Price US\$
OS-100SS	OIL SKIMMER WITH 12" STAINLESS STEEL WHEEL	
T-100	TIMER, ONE CHANNEL (CONTROLS HEAT)	
T-200	TIMER, TWO CHANNEL (CONTROLS HEAT & SKIMMER)	
THM-200	THERMOSTAT, DIGITAL SINGLE CHANNEL	
AW-100	AUTOMATIC WATER FILL	
FF-100	FAXON FLOAT - AUTO WATER FILL & LOW WATER SHUT-OFF COMBINATION	





# JRI® INDUSTRIES

## PREMIUM INDUSTRIAL FRONT LOAD MODELS



### PCS-3142

OVERALL DIMENSIONS	56" L X 49" W X 75" H
INSIDE WORKING HEIGHT	42"
TURNTABLE DIAMETER	31" ROLL-OUT
WEIGHT CAPACITY	1000 LBS
TANK CAPACITY	140 GAL
PUMP SIZE	5 HP VERTICAL
PUMP OUTPUT	49 PSI @ 85 GPM
ELECTRIC HEAT	12 KW
ELECTRICAL CONTROLS	INDUSTRIAL IEC/ROTARY STYLE
ELECTRICAL ENCLOSURE:	NEMA 12 RATED

#### STANDARD FEATURES:

- LOW WATER SHUT OFF
- SWING AWAY SPRAY BAR
- STAINLESS STEEL NOZZLES W/ BUSHINGS
- FORKLIFT ACCESS FROM FRONT OF MACHINE
- DEBRIS SCREEN
- CHIP BASKET

### MILD STEEL

JRI Part #	Power Source	Distributor Price US\$
PCS-3142A	230 V 1PH	
PCS-3142E	230 V 3PH	
PCS-3142F	460 V 3PH	
PCS-3142B	208 V 1PH	
PCS-3142C	208 V 3PH	
PCS-3142D	575 V 3PH	

### CABINET ONLY STAINLESS

JRI Part #	Power Source	Distributor Price US\$
PCS-3142SSA	230 V 1PH	
PCS-3142SSE	230 V 3PH	
PCS-3142SSF	460 V 3PH	
PCS-3142SSB	208 V 1PH	
PCS-3142SSC	208 V 3PH	
PCS-3142SSD	575 V 3PH	

### ALL WETTED SURFACES STAINLESS

\*Does not include SS pump

JRI Part #	Power Source	Distributor Price US\$
PCS-3142SS2A	230 V 1PH	
PCS-3142SS2E	230 V 3PH	
PCS-3142SS2F	460 V 3PH	
PCS-3142SS2B	208 V 1PH	
PCS-3142SS2C	208 V 3PH	
PCS-3142SS2D	575 V 3PH	

### COMMON OPTIONS (see Options tab for complete list)

JRI Part #	Description	Distributor Price US\$
OS-100SS	OIL SKIMMER WITH 12" STAINLESS STEEL WHEEL	
T-100	TIMER, ONE CHANNEL (CONTROLS HEAT)	
T-200	TIMER, TWO CHANNEL (CONTROLS HEAT & SKIMMER)	
THM-200	THERMOSTAT, DIGITAL SINGLE CHANNEL	
AW-100	AUTOMATIC WATER FILL	
FF-100	FAXON FLOAT - AUTO WATER FILL & LOW WATER SHUT-OFF COMBINATION	



# JRI® INDUSTRIES

## PREMIUM INDUSTRIAL FRONT LOAD MODELS

### PCS-3148



OVERALL DIMENSIONS	56" L X 49" W X 82" H
INSIDE WORKING HEIGHT	48"
TURNTABLE DIAMETER	31" ROLL-OUT
WEIGHT CAPACITY	1000 LBS
TANK CAPACITY	140 GAL
PUMP SIZE	5 HP VERTICAL
PUMP OUTPUT	49 PSI @ 85 GPM
ELECTRIC HEAT	12 KW
ELECTRICAL CONTROLS	INDUSTRIAL IEC/ROTARY STYLE
ELECTRICAL ENCLOSURE:	NEMA 12 RATED

**STANDARD FEATURES:**  
 LOW WATER SHUT OFF  
 SWING AWAY SPRAY BAR  
 STAINLESS STEEL NOZZLES W/ BUSHINGS  
 FORKLIFT ACCESS FROM FRONT OF MACHINE  
 DEBRIS SCREEN  
 CHIP BASKET

### MILD STEEL

JRI Part #	Power Source	Distributor Price US\$
PCS-3148E	230 V 3PH	
PCS-3148F	460 V 3PH	
PCS-3148C	208 V 3PH	
PCS-3148D	575 V 3PH	

### CABINET ONLY STAINLESS

JRI Part #	Power Source	Distributor Price US\$
PCS-3148SSE	230 V 3PH	
PCS-3148SSF	460 V 3PH	
PCS-3148SSC	208 V 3PH	
PCS-3148SSD	575 V 3PH	

### ALL WETTED SURFACES STAINLESS

\*Does not include SS pump

JRI Part #	Power Source	Distributor Price US\$
PCS-3148SS2E	230 V 3PH	
PCS-3148SS2F	460 V 3PH	
PCS-3148SS2C	208 V 3PH	
PCS-3148SS2D	575 V 3PH	

### COMMON OPTIONS (see Options tab for complete list)

JRI Part #	Description	Distributor Price US\$
OS-100SS	OIL SKIMMER WITH 12" STAINLESS STEEL WHEEL	
T-100	TIMER, ONE CHANNEL (CONTROLS HEAT)	
T-200	TIMER, TWO CHANNEL (CONTROLS HEAT & SKIMMER)	
THM-200	THERMOSTAT, DIGITAL SINGLE CHANNEL	
AW-100	AUTOMATIC WATER FILL	
FF-100	FAXON FLOAT - AUTO WATER FILL & LOW WATER SHUT-OFF COMBINATION	



# JRI® INDUSTRIES

## PREMIUM INDUSTRIAL FRONT LOAD MODELS



### PCS-3642

OVERALL DIMENSION	67"L X 54"W X 76"H
INSIDE WORKING HEIGHT	42"
TURNTABLE DIAMETER	36" ROLL-OUT
WEIGHT CAPACITY	1500 LBS
TANK CAPACITY	180 GAL
PUMP SIZE	5 HP VERTICAL
PUMP OUTPUT	49 PSI @ 85 GPM
ELECTRIC HEAT	18 KW
ELECTRICAL CONTROLS	INDUSTRIAL IEC/ROTARY STYLE
ELECTRICAL ENCLOSURE:	NEMA 12 RATED

#### **STANDARD FEATURES:**

- LOW WATER SHUT OFF
- SWING AWAY SPRAY BAR
- STAINLESS STEEL NOZZLES W/ BUSHINGS
- FORKLIFT ACCESS FROM FRONT OF MACHINE
- DEBRIS SCREEN
- CHIP BASKET

### MILD STEEL

JRI Part #	Power Source	Distributor Price US\$
PCS-3642E	230 V 3PH	
PCS-3642F	460 V 3PH	
PCS-3642C	208 V 3PH	
PCS-3642D	575 V 3PH	

### CABINET ONLY STAINLESS

JRI Part #	Power Source	Distributor Price US\$
PCS-3642SSE	230 V 3PH	
PCS-3642SSF	460 V 3PH	
PCS-3642SSC	208 V 3PH	
PCS-3642SSD	575 V 3PH	

### ALL WETTED SURFACES STAINLESS

\*Does not include SS pump

JRI Part #	Power Source	Distributor Price US\$
PCS-3642SS2E	230 V 3PH	
PCS-3642SS2F	460 V 3PH	
PCS-3642SS2C	208 V 3PH	
PCS-3642SS2D	575 V 3PH	

### COMMON OPTIONS (see Options tab for complete list)

JRI Part #	Description	Distributor Price US\$
OS-100SS	OIL SKIMMER WITH 12" STAINLESS STEEL WHEEL	
T-100	TIMER, ONE CHANNEL (CONTROLS HEAT)	
T-200	TIMER , TWO CHANNEL (CONTROLS HEAT & SKIMMER)	
THM-200	THERMOSTAT, DIGITAL SINGLE CHANNEL	
AW-100	AUTOMATIC WATER FILL	
FF-100	FAXON FLOAT - AUTO WATER FILL & LOW WATER SHUT-OFF COMBINATION	



# JRI® INDUSTRIES

## PREMIUM INDUSTRIAL FRONT LOAD MODELS

### PCS-3648



OVERALL DIMENSIONS	67"L X 54"W X 82"H
INSIDE WORKING HEIGHT	48"
TURNTABLE DIAMETER	36" ROLL OUT
WEIGHT CAPACITY	1500 LBS
TANK CAPACITY	180 GAL
PUMP SIZE	5 HP VERTICAL
PUMP OUTPUT	49 PSI @ 85 GPM
ELECTRIC HEAT	18 KW
ELECTRICAL CONTROLS	INDUSTRIAL IEC/ROTARY STYLE
ELECTRICAL ENCLOSURE:	NEMA 12 RATED

**STANDARD FEATURES:**  
 LOW WATER SHUT OFF  
 SWING AWAY SPRAY BAR  
 STAINLESS STEEL NOZZLES W/ BUSHINGS  
 FORKLIFT ACCESS FROM FRONT OF MACHINE  
 DEBRIS SCREEN  
 CHIP BASKET

### MILD STEEL

JRI Part #	Power Source	Distributor Price US\$
PCS-3648E	230 V 3PH	
PCS-3648F	460 V 3PH	
PCS-3648C	208 V 3PH	
PCS-3648D	575 V 3PH	

### CABINET ONLY STAINLESS

JRI Part #	Power Source	Distributor Price US\$
PCS-3648SSE	230 V 3PH	
PCS-3648SSF	460 V 3PH	
PCS-3648SSC	208 V 3PH	
PCS-3648SSD	575 V 3PH	

### ALL WETTED SURFACES STAINLESS

\*Does not include SS pump

JRI Part #	Power Source	Distributor Price US\$
PCS-3648SS2E	230 V 3PH	
PCS-3648SS2F	460 V 3PH	
PCS-3648SS2C	208 V 3PH	
PCS-3648SS2D	575 V 3PH	

### COMMON OPTIONS (see Options tab for complete list)

JRI Part #	Description	Distributor Price US\$
OS-100SS	OIL SKIMMER WITH 12" STAINLESS STEEL WHEEL	
T-100	TIMER, ONE CHANNEL (CONTROLS HEAT)	
T-200	TIMER, TWO CHANNEL (CONTROLS HEAT & SKIMMER)	
THM-200	THERMOSTAT, DIGITAL SINGLE CHANNEL	
AW-100	AUTOMATIC WATER FILL	
FF-100	FAXON FLOAT - AUTO WATER FILL & LOW WATER SHUT-OFF COMBINATION	



# JRI® INDUSTRIES

## PREMIUM INDUSTRIAL FRONT LOAD MODELS

### PCS-3660



OVERALL DIMENSIONS	67"L X 54"W X 94"H
INSIDE WORKING HEIGHT	60"
TURNTABLE DIAMETER	36" ROLL OUT
WEIGHT CAPACITY	1500 LBS
TANK CAPACITY	180 GAL
PUMP SIZE	7.5 HP VERTICAL
PUMP OUTPUT	74 PSI @ 120 GPM
ELECTRIC HEAT	18 KW
ELECTRICAL CONTROLS	INDUSTRIAL IEC/ROTARY STYLE
ELECTRICAL ENCLOSURE:	NEMA 12 RATED

**STANDARD FEATURES:**  
 LOW WATER SHUT OFF  
 SWING AWAY SPRAY BAR  
 STAINLESS STEEL NOZZLES W/ BUSHINGS  
 FORKLIFT ACCESS FROM FRONT OF MACHINE  
 DEBRIS SCREEN

### MILD STEEL

JRI Part #	Power Source	Distributor Price US\$
PCS-3660E	230 V 3PH	
PCS-3660F	460 V 3PH	
PCS-3660C	208 V 3PH	
PCS-3660D	575 V 3PH	

### CABINET ONLY STAINLESS

JRI Part #	Power Source	Distributor Price US\$
PCS-3660SSE	230 V 3PH	
PCS-3660SSF	460 V 3PH	
PCS-3660SSC	208 V 3PH	
PCS-3660SSD	575 V 3PH	

### ALL WETTED SURFACES STAINLESS

\*Does not include SS pump

JRI Part #	Power Source	Distributor Price US\$
PCS-3660SS2	230 V 3PH	
PCS-3660SS2	460 V 3PH	
PCS-3660SS2C	208 V 3PH	
PCS-3660SS2D	575 V 3PH	

### COMMON OPTIONS (see Options tab for complete list)

JRI Part #	Description	Distributor Price US\$
OS-100SS	OIL SKIMMER WITH 12" STAINLESS STEEL WHEEL	
T-100	TIMER, ONE CHANNEL (CONTROLS HEAT)	
T-200	TIMER , TWO CHANNEL (CONTROLS HEAT & SKIMMER)	
THM-200	THERMOSTAT, DIGITAL SINGLE CHANNEL	
AW-100	AUTOMATIC WATER FILL	
FF-100	FAXON FLOAT - AUTO WATER FILL & LOW WATER SHUT-OFF COMBINATION	



# JRI® INDUSTRIES

## PREMIUM INDUSTRIAL FRONT LOAD MODELS

### PCS-4255



OVERALL DIMENSIONS	73" L x 63" W x 90" H
INSIDE WORKING HEIGHT	55"
TURNTABLE DIAMETER	42" ROLL OUT
WEIGHT CAPACITY	1500 LBS
TANK CAPACITY	240 GAL
PUMP SIZE	7.5 HP VERTICAL
PUMP OUTPUT	74 PSI @ 120 GPM
ELECTRIC HEAT	18 KW
ELECTRICAL CONTROLS	INDUSTRIAL IEC/ROTARY STYLE
ELECTRICAL ENCLOSURE:	NEMA 12 RATED

**STANDARD FEATURES:**  
 LOW WATER SHUT OFF  
 SWING AWAY SPRAY BAR  
 STAINLESS STEEL NOZZLES W/ BUSHINGS  
 FORKLIFT ACCESS FROM FRONT OF MACHINE  
 DEBRIS SCREEN  
 CHIP BASKET

### MILD STEEL

JRI Part #	Power Source	Distributor Price US\$
PCS-4255E	230 V 3PH	
PCS-425F5	460 V 3PH	
PCS-4255C	208 V 3PH	
PCS-4255D	575 V 3PH	

### CABINET ONLY STAINLESS

JRI Part #	Power Source	Distributor Price US\$
PCS-4255SSE	230 V 3PH	
PCS-4255SSF	460 V 3PH	
PCS-4255SSC	208 V 3PH	
PCS-4255SSD	575 V 3PH	

### ALL WETTED SURFACES STAINLESS

\*Does not include SS pump

JRI Part #	Power Source	Distributor Price US\$
PCS-4255SS2E	230 V 3PH	
PCS-4255SS2F	460 V 3PH	
PCS-4255SS2C	208 V 3PH	
PCS-4255SS2D	575 V 3PH	

### COMMON OPTIONS (see Options tab for complete list)

JRI Part #	Description	Distributor Price US\$
OS-100SS	OIL SKIMMER WITH 12" STAINLESS STEEL WHEEL	
T-100	TIMER, ONE CHANNEL (CONTROLS HEAT)	
T-200	TIMER , TWO CHANNEL (CONTROLS HEAT & SKIMMER)	
THM-200	THERMOSTAT, DIGITAL SINGLE CHANNEL	
AW-100	AUTOMATIC WATER FILL	
FF-100	FAXON FLOAT - AUTO WATER FILL & LOW WATER SHUT-OFF COMBINATION	



# JRI® INDUSTRIES

## PREMIUM INDUSTRIAL FRONT LOAD MODELS

### PCS-4260



OVERALL DIMENSIONS	73"L X 63"W X 95"H
INSIDE WORKING HEIGHT	60"
TURNTABLE DIAMETER	42" ROLL OUT
WEIGHT CAPACITY	1500 LBS
TANK CAPACITY	240 GAL
PUMP SIZE	7.5 HP VERTICAL
PUMP OUTPUT	74 PSI @ 120 GPM
ELECTRIC HEAT	18 KW
ELECTRICAL CONTROLS	INDUSTRIAL IEC/ROTARY STYLE
ELECTRICAL ENCLOSURE:	NEMA 12 RATED

**STANDARD FEATURES:**  
 LOW WATER SHUT OFF  
 SWING AWAY SPRAY BAR  
 STAINLESS STEEL NOZZLES W/ BUSHINGS  
 FORKLIFT ACCESS FROM FRONT OF MACHINE  
 DEBRIS SCREEN  
 CHIP BASKET

### MILD STEEL

JRI Part #	Power Source	Distributor Price US\$
PCS-4260E	230 V 3PH	
PCS-4260F	460 V 3PH	
PCS-4260C	208 V 3PH	
PCS-4260D	575 V 3PH	

### CABINET ONLY STAINLESS

JRI Part #	Power Source	Distributor Price US\$
PCS-4260SSE	230 V 3PH	
PCS-4260SSF	460 V 3PH	
PCS-4260SSC	208 V 3PH	
PCS-4260SSD	575 V 3PH	

### ALL WETTED SURFACES STAINLESS

\*Does not include SS pump

JRI Part #	Power Source	Distributor Price US\$
PCS-4260SS2E	230 V 3PH	
PCS-4260SS2F	460 V 3PH	
PCS-4260SS2C	208 V 3PH	
PCS-4260SS2D	575 V 3PH	

### COMMON OPTIONS (see Options tab for complete list)

JRI Part #	Description	Distributor Price US\$
OS-100SS	OIL SKIMMER WITH 12" STAINLESS STEEL WHEEL	
T-100	TIMER, ONE CHANNEL (CONTROLS HEAT)	
T-200	TIMER , TWO CHANNEL (CONTROLS HEAT & SKIMMER)	
THM-200	THERMOSTAT, DIGITAL SINGLE CHANNEL	
AW-100	AUTOMATIC WATER FILL	
FF-100	FAXON FLOAT - AUTO WATER FILL & LOW WATER SHUT-OFF COMBINATION	





# JRI® INDUSTRIES

## PREMIUM INDUSTRIAL FRONT LOAD MODELS

### PCS-4272



OVERALL DIMENSIONS	73" L x 63" W x 107" H
INSIDE WORKING HEIGHT	72"
TURNTABLE DIAMETER	42" V-Notch Door - Jog Button
WEIGHT CAPACITY	1500 LBS
TANK CAPACITY	240 GAL
PUMP SIZE	10 HP VERTICAL
PUMP OUTPUT	72 PSI @ 150 GPM
ELECTRIC HEAT	36 KW
ELECTRICAL CONTROLS	INDUSTRIAL IEC/ROTARY STYLE
ELECTRICAL ENCLOSURE:	NEMA 12 RATED

**STANDARD FEATURES:**  
 LOW WATER SHUT OFF  
 SWING AWAY SPRAY BAR  
 STAINLESS STEEL NOZZLES W/ BUSHINGS  
 FORKLIFT ACCESS FROM FRONT OF MACHINE  
 DEBRIS SCREEN  
 CHIP BASKET

### MILD STEEL

JRI Part #	Power Source	Distributor Price US\$
PCS-4272E	230 V 3PH	
PCS-4272F	460 V 3PH	
PCS-4272C	208 V 3PH	
PCS-4272D	575 V 3PH	

### CABINET ONLY STAINLESS

JRI Part #	Power Source	Distributor Price US\$
PCS-4272SSE	230 V 3PH	
PCS-4272SSF	460 V 3PH	
PCS-4272SSC	208 V 3PH	
PCS-4272SSD	575 V 3PH	

### ALL WETTED SURFACES STAINLESS

\*Does not include SS pump

JRI Part #	Power Source	Distributor Price US\$
PCS-4272SS2E	230 V 3PH	
PCS-4272SS2F	460 V 3PH	
PCS-4272SS2C	208 V 3PH	
PCS-4272SS2D	575 V 3PH	

**\*\*CONSULT WITH GREEN POWER CHEMICAL 800-932-9371 ON CORRECT OPTIONS FOR CUSTOMER APPLICATION\*\***





# JRI® INDUSTRIES

## PREMIUM INDUSTRIAL FRONT LOAD MODELS

### PCS-5060



OVERALL DIMENSIONS	81"L x 69"W x 97"H
INSIDE WORKING HEIGHT	60"
TURNTABLE DIAMETER	50" V-Notch Door - Jog Button
WEIGHT CAPACITY	1500 LBS
TANK CAPACITY	300 GAL
PUMP SIZE	15 HP VERTICAL
PUMP OUTPUT	75 PSI @ 200 GPM
ELECTRIC HEAT	36 KW
ELECTRICAL CONTROLS	INDUSTRIAL IEC/ROTARY STYLE
ELECTRICAL ENCLOSURE:	NEMA 12 RATED

**STANDARD FEATURES:**  
 LOW WATER SHUT OFF  
 STAINLESS STEEL NOZZLES W/ BUSHINGS  
 FORKLIFT ACCESS FROM FRONT OF MACHINE  
 DEBRIS SCREEN  
 CHIP BASKET

### MILD STEEL

JRI Part #	Power Source	Distributor Price US\$
PCS-5060E	230 V 3PH	
PCS-5060F	460 V 3PH	
PCS-5060C	208 V 3PH	
PCS-5060D	575 V 3PH	

### CABINET ONLY STAINLESS

JRI Part #	Power Source	Distributor Price US\$
PCS-5060SSE	230 V 3PH	
PCS-5060SSF	460 V 3PH	
PCS-5060SSC	208 V 3PH	
PCS-5060SSD	575 V 3PH	

### ALL WETTED SURFACES STAINLESS

\*Does not include SS pump

JRI Part #	Power Source	Distributor Price US\$
PCS-5060SS2E	230 V 3PH	
PCS-5060SS2F	460 V 3PH	
PCS-5060SS2C	208 V 3PH	
PCS-5060SS2D	575 V 3PH	

**\*\*CONSULT WITH GREEN POWER CHEMICAL 800-932-9371 ON CORRECT OPTIONS FOR CUSTOMER APPLICATION\*\***



# JRI® INDUSTRIES

## PREMIUM INDUSTRIAL FRONT LOAD MODELS

### PCS-5072



OVERALL DIMENSIONS	81"L x 69"W x 109" H
INSIDE WORKING HEIGHT	72"
TURNTABLE DIAMETER	50" V-Notch Door - Jog Button
WEIGHT CAPACITY	1500 LBS
TANK CAPACITY	300 GAL
PUMP SIZE	15 HP VERTICAL
PUMP OUTPUT	75 PSI @ 200 GPM
ELECTRIC HEAT	36 KW
ELECTRICAL CONTROLS	INDUSTRIAL IEC/ROTARY STYLE
ELECTRICAL ENCLOSURE:	NEMA 12 RATED

**STANDARD FEATURES:**  
 LOW WATER SHUT OFF  
 STAINLESS STEEL NOZZLES W/ BUSHINGS  
 FORKLIFT ACCESS FROM FRONT OF MACHINE  
 DEBRIS SCREEN  
 CHIP BASKET

### MILD STEEL

JRI Part #	Power Source	Distributor Price US\$
PCS-5072E	230 V 3PH	
PCS-5072F	460 V 3PH	
PCS-5072C	208 V 3PH	
PCS-5072D	575 V 3PH	

### CABINET ONLY STAINLESS

JRI Part #	Power Source	Distributor Price US\$
PCS-5072SSE	230 V 3PH	
PCS-5072SSF	460 V 3PH	
PCS-5072SSC	208 V 3PH	
PCS-5072SSD	575 V 3PH	

### ALL WETTED SURFACES STAINLESS

\*Does not include SS pump

JRI Part #	Power Source	Distributor Price US\$
PCS-5072SS2E	230 V 3PH	
PCS-5072SS2F	460 V 3PH	
PCS-5072SS2C	208 V 3PH	
PCS-5072SS2D	575 V 3PH	

**\*\*CONSULT WITH GREEN POWER CHEMICAL 800-932-9371 ON CORRECT OPTIONS FOR CUSTOMER APPLICATION\*\***



# JRI® INDUSTRIES

## PREMIUM INDUSTRIAL FRONT LOAD MODELS

### PCS-6060



OVERALL DIMENSIONS	91"L X 79"W X 96" H
INSIDE WORKING HEIGHT	60"
TURNTABLE DIAMETER	60" V-Notch Door - Jog Button
WEIGHT CAPACITY	1500 LBS
TANK CAPACITY	400 GAL
PUMP SIZE	15 HP VERTICAL
PUMP OUTPUT	75 PSI @ 200 GPM
ELECTRIC HEAT	36 KW
ELECTRICAL CONTROLS	INDUSTRIAL IEC/ROTARY STYLE
ELECTRICAL ENCLOSURE:	NEMA 12 RATED
<b>STANDARD FEATURES:</b>	
LOW WATER SHUT OFF	
STAINLESS STEEL NOZZLES W/ BUSHINGS	
FORKLIFT ACCESS FROM FRONT OF MACHINE	
DEBRIS SCREEN	
CHIP BASKET	

### MILD STEEL

JRI Part #	Power Source	Distributor Price US\$
PCS-6060E	230 V 3PH	
PCS-6060F	460 V 3PH	
PCS-6060C	208 V 3PH	
PCS-6060D	575 V 3PH	

### CABINET ONLY STAINLESS

JRI Part #	Power Source	Distributor Price US\$
PCS-6060SSE	230 V 3PH	
PCS-6060SSF	460 V 3PH	
PCS-6060SSC	208 V 3PH	
PCS-6060SSD	575 V 3PH	

### ALL WETTED SURFACES STAINLESS

\*Does not include SS pump

JRI Part #	Power Source	Distributor Price US\$
PCS-6060SS2E	230 V 3PH	
PCS-6060SS2F	460 V 3PH	
PCS-6060SS2C	208 V 3PH	
PCS-6060SS2D	575 V 3PH	

**\*\*CONSULT WITH GREEN POWER CHEMICAL 800-932-9371 ON CORRECT OPTIONS FOR CUSTOMER APPLICATION\*\***



# JRI® INDUSTRIES

## PREMIUM INDUSTRIAL FRONT LOAD MODELS

### PCS-6072



OVERALL DIMENSIONS	79"W X 91"L X 108" H
INSIDE WORKING HEIGHT	72"
TURNTABLE DIAMETER	60" V-Notch Door - Jog Button
WEIGHT CAPACITY	1500 LBS
TANK CAPACITY	400 GAL
PUMP SIZE	15 HP VERTICAL
PUMP OUTPUT	75 PSI @ 200 GPM
ELECTRIC HEAT	36 KW
ELECTRICAL CONTROLS	INDUSTRIAL IEC/ROTARY STYLE
ELECTRICAL ENCLOSURE:	NEMA 12 RATED

**STANDARD FEATURES:**  
 LOW WATER SHUT OFF  
 STAINLESS STEEL NOZZLES W/ BUSHINGS  
 FORKLIFT ACCESS FROM FRONT OF MACHINE  
 DEBRIS SCREEN  
 CHIP BASKET

### MILD STEEL

JRI Part #	Power Source	Distributor Price US\$
PCS-6072E	230 V 3PH	
PCS-6072F	460 V 3PH	
PCS-6072C	208 V 3PH	
PCS-6072D	575 V 3PH	

### CABINET ONLY STAINLESS

JRI Part #	Power Source	Distributor Price US\$
PCS-6072SSE	230 V 3PH	
PCS-6072SSF	460 V 3PH	
PCS-6072SSC	208 V 3PH	
PCS-6072SSD	575 V 3PH	

### ALL WETTED SURFACES STAINLESS

\*Does not include SS pump

JRI Part #	Power Source	Distributor Price US\$
PCS-6072SS2E	230 V 3PH	
PCS-6072SS2F	460 V 3PH	
PCS-6072SS2C	208 V 3PH	
PCS-6072SS2D	575 V 3PH	

**\*\*CONSULT WITH GREEN POWER CHEMICAL 800-932-9371 ON CORRECT OPTIONS FOR CUSTOMER APPLICATION\*\***



# JRI® INDUSTRIES

## PREMIUM INDUSTRIAL FRONT LOAD MODELS

### PCS-7260



OVERALL DIMENSIONS 105"L X 91"W X 97" H  
 INSIDE WORKING HEIGHT 60"  
 TURNTABLE DIAMETER 72" V-Notch Door - Jog Button  
 WEIGHT CAPACITY 2000 LBS  
 TANK CAPACITY 550 GAL  
 PUMP SIZE 15 HP VERTICAL  
 PUMP OUTPUT 75 PSI @ 200 GPM  
 ELECTRIC HEAT 36 KW  
 ELECTRICAL CONTROLS INDUSTRIAL IEC/ROTARY STYLE  
 ELECTRICAL ENCLOSURE: NEMA 12 RATED

**STANDARD FEATURES:**  
 LOW WATER SHUT OFF  
 STAINLESS STEEL NOZZLES W/ BUSHINGS  
 FORKLIFT ACCESS FROM FRONT OF MACHINE  
 DEBRIS SCREEN  
 CHIP BASKET

### MILD STEEL

JRI Part #	Power Source	Distributor Price US\$
PCS-7260E	230 V 3PH	
PCS-7260F	460 V 3PH	
PCS-7260C	208 V 3PH	
PCS-7260D	575 V 3PH	

### CABINET ONLY STAINLESS

JRI Part #	Power Source	Distributor Price US\$
PCS-7260SSE	230 V 3PH	
PCS-7260SSF	460 V 3PH	
PCS-7260SSC	208 V 3PH	
PCS-7260SSD	575 V 3PH	

### ALL WETTED SURFACES STAINLESS

\*Does not include SS pump

JRI Part #	Power Source	Distributor Price US\$
PCS-7260SS2E	230 V 3PH	
PCS-7260SS2F	460 V 3PH	
PCS-7260SS2C	208 V 3PH	
PCS-7260SS2D	575 V 3PH	

**\*\*CONSULT WITH GREEN POWER CHEMICAL 800-932-9371 ON CORRECT OPTIONS FOR CUSTOMER APPLICATION\*\***

**CALL 800-932-9371  
FOR CURRENT PRICING**



# JRI® INDUSTRIES

## PREMIUM INDUSTRIAL FRONT LOAD MODELS

### PCS-7272



OVERALL DIMENSIONS 105"L X 91"W X 109" H  
 INSIDE WORKING HEIGHT 72"  
 TURNTABLE DIAMETER 72" V-Notch Door - Jog Button  
 WEIGHT CAPACITY 2000 LBS  
 TANK CAPACITY 550 GAL  
 PUMP SIZE 15 HP VERTICAL  
 PUMP OUTPUT 75 PSI @ 200 GPM  
 ELECTRIC HEAT 36 KW  
 ELECTRICAL CONTROLS INDUSTRIAL IEC/ROTARY STYLE  
 ELECTRICAL ENCLOSURE: NEMA 12 RATED  
**STANDARD FEATURES:**  
 LOW WATER SHUT OFF  
 STAINLESS STEEL NOZZLES W/ BUSHINGS  
 FORKLIFT ACCESS FROM FRONT OF MACHINE  
 DEBRIS SCREEN

### MILD STEEL

JRI Part #	Power Source	Distributor Price US\$
PCS-7272E	230 V 3PH	
PCS-7272F	460 V 3PH	
PCS-7272C	208 V 3PH	
PCS-7272D	575 V 3PH	

### CABINET ONLY STAINLESS

JRI Part #	Power Source	Distributor Price US\$
PCS-7272SSE	230 V 3PH	
PCS-7272SSF	460 V 3PH	
PCS-7272SSC	208 V 3PH	
PCS-7272SSD	575 V 3PH	

### ALL WETTED SURFACES STAINLESS

\*Does not include SS pump

JRI Part #	Power Source	Distributor Price US\$
PCS-7272SS2E	230 V 3PH	
PCS-7272SS2F	460 V 3PH	
PCS-7272SS2C	208 V 3PH	
PCS-7272SS2D	575 V 3PH	

**\*\*CONSULT WITH GREEN POWER CHEMICAL ON CORRECT OPTIONS FOR CUSTOMER APPLICATION\*\***


**CALL 800-932-9371  
FOR CURRENT PRICING**



# JRI® INDUSTRIES

## PREMIUM INDUSTRIAL MODULAR CONVEYOR MODELS

### MCCS-1000 SINGLE STAGE (WASH ONLY)

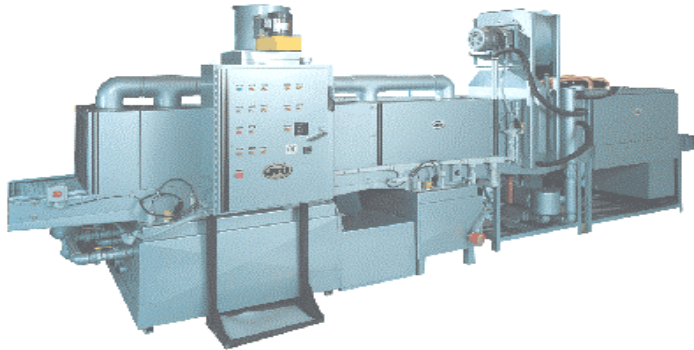

OVERALL DIMENSIONS	84" L X 51" W X 72" H
TUNNEL OPENING	15" TALL X 24" WIDE
BELT TYPE	24" WIDE, 1" X 1" STEEL MESH GALVANIZED
WEIGHT CAPACITY	1000 LBS
WASH TANK CAPACITY	200 GAL
WASH PUMP SIZE	5 HP VERTICAL
PUMP OUTPUT	40 PSI 100 GPM
WASH ELECTRIC HEAT	36 KW
ELECTRICAL CONTROLS	INDUSTRIAL IEC/ROTARY STYLE
ELECTRICAL ENCLOSURE:	NEMA 12 RATED
<b>STANDARD FEATURES:</b>	
LOW WATER SHUT OFF	
STAINLESS STEEL NOZZLES W/ BUSHINGS	
CHIP BASKET	
SLIP CLUTCH	

#### MILD STEEL

JRI Part #	Power Source	Distributor Price US\$
MCCS-1000E	230 V 3PH	
MCCS-1000F	460 V 3PH	
MCCS-1000C	208 V 3PH	
MCCS-1000D	575 V 3PH	

#### CABINET ONLY STAINLESS

JRI Part #	Power Source	Distributor Price US\$
MCCS-1000SSE	230 V 3PH	
MCCS-1000SSF	460 V 3PH	
MCCS-1000SSC	208 V 3PH	
MCCS-1000SSD	575 V 3PH	

#### ALL WETTED SURFACES STAINLESS

\*Does not include SS pump

JRI Part #	Power Source	Distributor Price US\$
MCCS-1000SS2E	230 V 3PH	
MCCS-1000SS2F	460 V 3PH	
MCCS-1000SS2C	208 V 3PH	
MCCS-1000SS2D	575 V 3PH	

**\*\*CONSULT WITH GREEN POWER CHEMICAL ON CORRECT OPTIONS FOR CUSTOMER APPLICATION\*\***

**CALL 800-932-9371  
FOR CURRENT PRICING**






# JRI® INDUSTRIES

## PREMIUM INDUSTRIAL MODULAR CONVEYOR MODELS

### **MCCS-1500** **TWO STAGE** **(WASH, BLOW-OFF)**

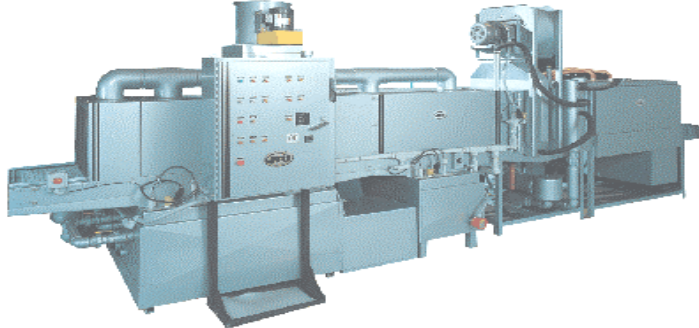

OVERALL DIMENSIONS  
TUNNEL OPENING  
BELT TYPE  
WEIGHT CAPACITY  
WASH TANK CAPACITY  
WASH PUMP SIZE  
PUMP OUTPUT  
WASH ELECTRIC HEAT  
BLOWER SIZE  
ELECTRICAL CONTROLS  
ELECTRICAL ENCLOSURE:  
**STANDARD FEATURES:**  
LOW WATER SHUT OFF  
STAINLESS STEEL NOZZLES W/ BUSHINGS  
CHIP BASKET  
SLIP CLUTCH

132" L X 51" W X 72" H  
15" TALL X 24" WIDE  
24" WIDE, 1" X 1" STEEL MESH GALVANIZED  
1000 LBS  
200 GAL INSULATED  
5 HP VERTICAL  
40 PSI @ 100 GPM  
36 KW  
8.5 REGENERATIVE BLOWER  
INDUSTRIAL IEC/ROTARY STYLE  
NEMA 12 RATED

#### MILD STEEL

JRI Part #	Power Source	Distributor Price US\$
MCCS-1500E	230 V 3PH	
MCCS-1500F	460 V 3PH	
MCCS-1500C	208 V 3PH	
MCCS-1500D	575 V 3PH	

#### CABINET ONLY STAINLESS

JRI Part #	Power Source	Distributor Price US\$
MCCS-1500SSE	230 V 3PH	
MCCS-1500SSF	460 V 3PH	
MCCS-1500SSC	208 V 3PH	
MCCS-1500SSD	575 V 3PH	

#### ALL WETTED SURFACES STAINLESS

\*Does not include SS pump

JRI Part #	Power Source	Distributor Price US\$
MCCS-1500SS2E	230 V 3PH	
MCCS-1500SS2F	460 V 3PH	
MCCS-1500SS2C	208 V 3PH	
MCCS-1500SS2D	575 V 3PH	

**\*\*CONSULT WITH GREEN POWER CHEMICAL 800-932-9371 ON CORRECT OPTIONS FOR CUSTOMER APPLICATION\*\***

**CALL 800-932-9371  
FOR CURRENT PRICING**






# JRI® INDUSTRIES

## PREMIUM INDUSTRIAL MODULAR CONVEYOR MODELS

### MCCS-1500 H TWO STAGE (WASH, BLOW-OFF)

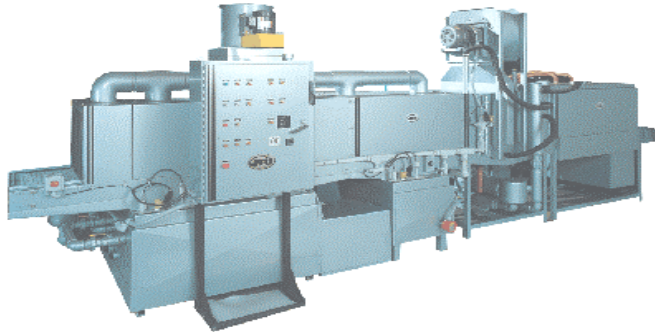

OVERALL DIMENSIONS	204" L X 51" W X 72" H
TUNNEL OPENING	15" TALL X 24" WIDE
BELT TYPE	24" WIDE, 1" X 1" STEEL MESH GALVANIZED
WEIGHT CAPACITY	1000 LBS
WASH TANK CAPACITY	200 GAL INSULATED
WASH PUMP SIZE	5 HP VERTICAL
PUMP OUTPUT	40 PSI @ 100 GPM
WASH ELECTRIC HEAT	36 KW
BLOWER SIZE	10 HP HIGH VOLUME BLOWER
ELECTRICAL CONTROLS	INDUSTRIAL IEC/ROTARY STYLE
ELECTRICAL ENCLOSURE:	NEMA 12 RATED
<b>STANDARD FEATURES:</b>	
LOW WATER SHUT OFF	
STAINLESS STEEL NOZZLES W/ BUSHINGS	
CHIP BASKET	
SLIP CLUTCH	

#### MILD STEEL

JRI Part #	Power Source		Distributor Price US\$
MCCS-1500HE	230 V 3PH		
MCCS-1500HF	460 V 3PH		
MCCS-1500HC	208 V 3PH		
MCCS-1500HD	575 V 3PH		

#### CABINET ONLY STAINLESS

JRI Part #	Power Source		Distributor Price US\$
MCCS-1500SSHE	230 V 3PH		
MCCS-1500SSHF	460 V 3PH		
MCCS-1500SSHC	208 V 3PH		
MCCS-1500SSHD	575 V 3PH		

#### ALL WETTED SURFACES STAINLESS

\*Does not include SS pump

JRI Part #	Power Source		Distributor Price US\$
MCCS-1500SS2HE	230 V 3PH		
MCCS-1500SS2HF	460 V 3PH		
MCCS-1500SS2HC	208 V 3PH		
MCCS-1500SS2HD	575 V 3PH		

**\*\*CONSULT WITH GREEN POWER CHEMICAL 800-932-9371 ON CORRECT OPTIONS FOR CUSTOMER APPLICATION\*\***


**CALL 800-932-9371  
FOR CURRENT PRICING**



# JRI® INDUSTRIES

## PREMIUM INDUSTRIAL MODULAR CONVEYOR MODELS

### MCCS-2000 TWO STAGE (WASH, RINSE)

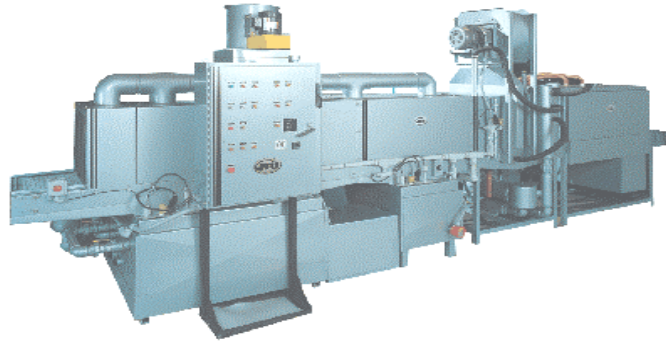

OVERALL DIMENSIONS  
TUNNEL OPENING  
BELT TYPE  
WEIGHT CAPACITY  
WASH TANK CAPACITY  
RINSE TANK CAPACITY  
WASH PUMP SIZE  
RINSE PUMP SIZE  
PUMP OUTPUT  
WASH ELECTRIC HEAT  
RINSE ELECTRIC HEAT  
ELECTRICAL CONTROLS  
ELECTRICAL ENCLOSURE:

168" L X 51" W X 72" H  
15" TALL X 24" WIDE  
24" WIDE, 1" X 1" STEEL MESH GALVANIZED  
1000 LBS  
200 GAL INSULATED  
200 GAL INSULATED  
5 HP VERTICAL  
5 HP VERTICAL  
40 PSI @ 100 GPM  
36 KW  
18 KW  
INDUSTRIAL IEC/ROTARY STYLE  
NEMA 12 RATED

**STANDARD FEATURES:**  
LOW WATER SHUT OFF FOR BOTH STAGES  
STAINLESS STEEL NOZZLES W/ BUSHINGS  
CHIP BASKET IN WASH AND RINSE  
SLIP CLUTCH

#### MILD STEEL

JRI Part #	Power Source	Distributor Price US\$
MCCS-2000E	230 V 3PH	
MCCS-2000F	460 V 3PH	
MCCS-2000C	208 V 3PH	
MCCS-2000D	575 V 3PH	

#### CABINET ONLY STAINLESS

JRI Part #	Power Source	Distributor Price US\$
MCCS-2000SSE	230 V 3PH	
MCCS-2000SSF	460 V 3PH	
MCCS-2000SSC	208 V 3PH	
MCCS-2000SSD	575 V 3PH	

#### ALL WETTED SURFACES STAINLESS

\*Does not include SS pump


JRI Part #	Power Source	Distributor Price US\$
MCCS-2000SS2E	230 V 3PH	
MCCS-2000SS2F	460 V 3PH	
MCCS-2000SS2C	208 V 3PH	
MCCS-2000SS2D	575 V 3PH	

**\*\*CONSULT WITH GREEN POWER CHEMICAL 800-932-9371 ON CORRECT OPTIONS FOR CUSTOMER APPLICATION\*\***

**CALL 800-932-9371  
FOR CURRENT PRICING**



**MCCS-3000**  
**THREE STAGE (WASH,  
RINSE, BLOW-OFF)**

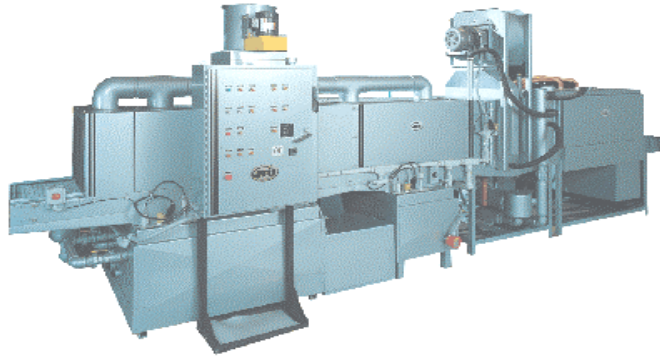

OVERALL DIMENSIONS	216" L X 51" W X 72" H
TUNNEL OPENING	15" TALL X 24" WIDE
BELT TYPE	24" WIDE, 1" X 1" STEEL MESH GALVANIZED
WEIGHT CAPACITY	1000 LBS
WASH TANK CAPACITY	200 GAL INSULATED
RINSE TANK CAPACITY	200 GAL INSULATED
WASH PUMP SIZE	5 HP VERTICAL
RINSE PUMP SIZE	5 HP VERTICAL
PUMP OUTPUT	40 PSI @ 100 GPM
WASH ELECTRIC HEAT	36 KW
RINSE ELECTRIC HEAT	18 KW
BLOWER SIZE	8.5 REGENERATIVE BLOWER
ELECTRICAL CONTROLS	INDUSTRIAL IEC/ROTARY STYLE
ELECTRICAL ENCLOSURE:	NEMA 12 RATED
<b>STANDARD FEATURES:</b>	
LOW WATER SHUT OFF FOR WASH AND RINSE STAGES	
STAINLESS STEEL NOZZLES W/ BUSHINGS	
CHIP BASKET IN WASH AND RINSE	
SLIP CLUTCH	

**MILD STEEL**

JRI Part #	Power Source	Distributor Price US\$
MCCS-3000E	230 V 3PH	
MCCS-3000F	460 V 3PH	
MCCS-3000C	208 V 3PH	
MCCS-3000D	575 V 3PH	

**CABINET ONLY STAINLESS**

JRI Part #	Power Source	Distributor Price US\$
MCCS-3000SSE	230 V 3PH	
MCCS-3000SSF	460 V 3PH	
MCCS-3000SSC	208 V 3PH	
MCCS-3000SSD	575 V 3PH	

**ALL WETTED SURFACES STAINLESS**


\*Does not include SS pump

JRI Part #	Power Source	Distributor Price US\$
MCCS-3000SS2E	230 V 3PH	
MCCS-3000SS2F	460 V 3PH	
MCCS-3000SS2C	208 V 3PH	
MCCS-3000SS2D	575 V 3PH	

**\*\*CONSULT WITH GREEN POWER CHEMICAL 800-932-9371 ON CORRECT OPTIONS FOR CUSTOMER APPLICATION\*\***



**MCCS-3000H**  
**THREE STAGE**  
**(WASH, RINSE, HEATED BLOW-OFF)**

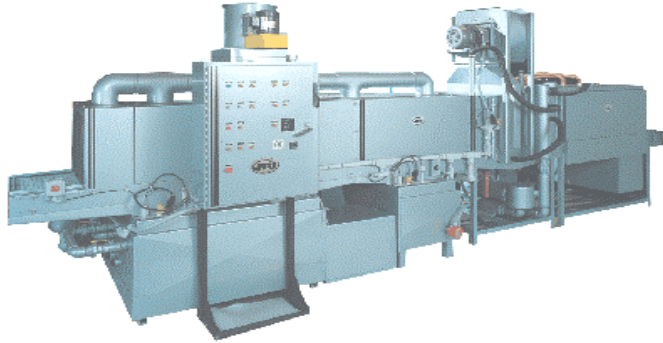

OVERALL DIMENSIONS	288" L X 51" W X 72" H
TUNNEL OPENING	15" TALL X 24" WIDE
BELT TYPE	24" WIDE, 1" X 1" STEEL MESH GALVANIZED
WEIGHT CAPACITY	1000 LBS
WASH TANK CAPACITY	200 GAL INSULATED
RINSE TANK CAPACITY	200 GAL INSULATED
WASH PUMP SIZE	5 HP VERTICAL
RINSE PUMP SIZE	5 HP VERTICAL
PUMP OUTPUT	40 PSI @ 100 GPM
WASH ELECTRIC HEAT	36 KW
RINSE ELECTRIC HEAT	18 KW
BLOWER SIZE	10 HP HIGH VOLUME BLOWER
IN-LINE DUCT HEATER	36 KW
ELECTRICAL CONTROLS	INDUSTRIAL IEC/ROTARY STYLE
ELECTRICAL ENCLOSURE:	NEMA 12 RATED
<b>STANDARD FEATURES:</b>	
LOW WATER SHUT OFF FOR WASH AND RINSE STAGES	
STAINLESS STEEL NOZZLES W/ BUSHINGS	
CHIP BASKET IN WASH AND RINSE	
SLIP CLUTCH	

**MILD STEEL**

JRI Part #	Power Source	Distributor Price US\$
MCCS-3000HE	230 V 3PH	
MCCS-3000HF	460 V 3PH	
MCCS-3000HC	208 V 3PH	
MCCS-3000HD	575 V 3PH	

**CABINET ONLY STAINLESS**

JRI Part #	Power Source	Distributor Price US\$
MCCS-3000SSHE	230 V 3PH	
MCCS-3000SSHF	460 V 3PH	
MCCS-3000SSHC	208 V 3PH	
MCCS-3000SSHD	575 V 3PH	

**ALL WETTED SURFACES STAINLESS**

\*Does not include SS pump

JRI Part #	Power Source	Distributor Price US\$
MCCS-3000SS2HE	230 V 3PH	
MCCS-3000SS2HF	460 V 3PH	
MCCS-3000SS2HC	208 V 3PH	
MCCS-3000SS2HD	575 V 3PH	

**\*\*CONSULT WITH GREEN POWER CHEMICAL 800-932-9371 ON CORRECT OPTIONS FOR CUSTOMER APPLICATION\*\***

**CALL 800-932-9371**  
**FOR CURRENT PRICING**



# JRI® INDUSTRIES

## PREMIUM INDUSTRIAL HEATED AGITATION DIP TANKS

### DAT-3612 DIP AGITATION



PLATFORM DIMENSIONS  
WEIGHT CAPACITY  
TANK CAPACITY  
ELECTRIC HEAT

36" L X 12" W X 12" D  
150 LBS  
40 GAL  
6 KW

\*\*Available in non-heated configuration

#### MILD STEEL

JRI Part #	Power Source	Distributor Price US\$
DAT-3612HA	230 V 1PH	
DAT-3612HB	208 V 1PH	
DAT-3612HE	230 V 3PH	
DAT-3612HF	460 V 3PH	
DAT-3612HC	208 V 3PH	
DAT-3612HD	575 V 3PH	

#### OPTION

Spray Under Immersion	3/4HP Circulation pump with spray agitation	
-----------------------	---	--

#### ALL WETTED SURFACES STAINLESS

JRI Part #	Power Source	Distributor Price US\$
DAT-3612HSS2A	230 V 1PH	
DAT-3612HSS2B	208 V 1PH	
DAT-3612HSS2E	230 V 3PH	
DAT-3612HSS2F	460 V 3PH	
DAT-3612HSS2C	208 V 3PH	
DAT-3612HSS2D	575 V 3PH	

#### OPTION

Spray Under Immersion SS	3/4HP Circulation pump with spray agitation (Stainless Steel)	
--------------------------	---	--

IN-3612	Insulation Skin (Mild Steel)	
IN-3612SS	Insulation Skin (Stainless Steel)	

**CALL 800-932-9371  
FOR CURRENT PRICING**



# JRI® INDUSTRIES

## PREMIUM INDUSTRIAL HEATED AGITATION DIP TANKS

### DAT-4419 DIP AGITATION



PLATFORM DIMENSIONS  
WEIGHT CAPACITY  
TANK CAPACITY  
ELECTRIC HEAT

44" L X 19" W X 12" D  
250 LBS  
80 GAL  
12 KW

\*\*Available in non-heated configuration

#### MILD STEEL

JRI Part #	Power Source	Distributor Price US\$
DAT-4419HA	230 V 1PH	
DAT-4419HB	208 V 1PH	
DAT-4419HE	230 V 3PH	
DAT-4419HF	460 V 3PH	
DAT-4419HC	208 V 3PH	
DAT-4419HD	575 V 3PH	

#### OPTION

Spray Under Immersion	3/4HP Circulation pump with spray agitation	
-----------------------	---	--

#### ALL WETTED SURFACES STAINLESS

JRI Part #	Power Source	Distributor Price US\$
DAT-4419SS2HA	230 V 1PH	
DAT-4419SS2HB	208 V 1PH	
DAT-4419SS2HE	230 V 3PH	
DAT-4419SS2HF	460 V 3PH	
DAT-4419SS2HC	208 V 3PH	
DAT-4419SS2HD	575 V 3PH	

#### OPTION

Spray Under Immersion SS	3/4HP Circulation pump with spray agitation (Stainless Steel)	
--------------------------	---	--

IN-4419	Insulation Skin (Mild Steel)	
IN-4419SS	Insulation Skin (Stainless Steel)	

**CALL 800-932-9371  
FOR CURRENT PRICING**



# JRI® INDUSTRIES

## PREMIUM INDUSTRIAL HEATED AGITATION DIP TANKS

### DAT-4620 DIP AGITATION



PLATFORM DIMENSIONS  
WEIGHT CAPACITY  
TANK CAPACITY  
ELECTRIC HEAT

46" L X 20" W X 20" D  
350 LBS  
100 GAL  
12 KW

\*\*Available in non-heated configuration

#### MILD STEEL

JRI Part #	Power Source	Distributor Price US\$
DAT-4620HA	230 V 1PH	
DAT-4620HB	208 V 1PH	
DAT-4620HE	230 V 3PH	
DAT-4620HF	460 V 3PH	
DAT-4620HC	208 V 3PH	
DAT-4620HD	575 V 3PH	

#### OPTION

Spray Under Immersion	3/4HP Circulation pump with spray agitation	
-----------------------	---	--

#### ALL WETTED SURFACES STAINLESS

JRI Part #	Power Source	Distributor Price US\$
DAT-4620HSS2A	230 V 1PH	
DAT-4620HSS2B	208 V 1PH	
DAT-4620HSS2E	230 V 3PH	
DAT-4620HSS2F	460 V 3PH	
DAT-4620HSS2C	208 V 3PH	
DAT-4620HSS2D	575 V 3PH	

#### OPTION

Spray Under Immersion SS	3/4HP Circulation pump with spray agitation (Stainless Steel)	
--------------------------	---	--

IN-4620	Insulation Skin (Mild Steel)	
IN-4620SS	Insulation Skin (Stainless Steel)	

**CALL 800-932-9371**  
**FOR CURRENT PRICING**

\*\*Confidential\*\*  
\*\*Internal Use Only\*\*



# JRI® INDUSTRIES

## PREMIUM INDUSTRIAL HEATED AGITATION DIP TANKS

### DAT-4830 DIP AGITATION



PLATFORM DIMENSIONS  
WEIGHT CAPACITY  
TANK CAPACITY  
ELECTRIC HEAT

48" L X 30" W X 24" D  
500 LBS  
120 GAL  
18 KW

\*\*Available in non-heated configuration

#### MILD STEEL

JRI Part #	Power Source	Distributor Price US\$
DAT-4830HA	230 V 1PH	
DAT-4830HB	208 V 1PH	
DAT-4830HE	230 V 3PH	
DAT-4830HF	460 V 3PH	
DAT-4830HC	208 V 3PH	
DAT-4830HD	575 V 3PH	

#### OPTION

Spray Under Immersion	1 1/2HP Circulation pump with spray agitation	
-----------------------	---	--

#### ALL WETTED SURFACES STAINLESS

JRI Part #	Power Source	Distributor Price US\$
DAT-4830SS2HA	230 V 1PH	
DAT-4830SS2HB	208 V 1PH	
DAT-4830SS2HE	230 V 3PH	
DAT-4830SS2HF	460 V 3PH	
DAT-4830SS2HC	208 V 3PH	
DAT-4830SS2HD	575 V 3PH	

#### OPTION

Spray Under Immersion SS	1 1/2HP Circulation pump with spray agitation (Stainless Steel)	
--------------------------	---	--

IN-483024	Insulation Skin (Mild Steel)	
IN-483024SS	Insulation Skin (Stainless Steel)	

**CALL 800-932-9371  
FOR CURRENT PRICING**